

10K CAST STAINLESS STEEL BALL VALVE FLANGED ENDS WITH PNEUMATIC ACTUATOR

KITZ Fig: BS-10UTDZ

Sizes: 1/2-10inch(15-250mm)

静電防止機構付, フルボア形, IS05211対応, スプリングリターン型
Standards

- End to End: ASME B16.10 CLASS 150
- End Connection: JIS B2220 10K
- Wall Thickness: ASME B16.34 CLASS 150
- Test Standard
- KITZ STANDARD


Dimensions

SIZE (inch/mm)	L	L1	H	D1	Kg
1/2 15	108.0	44.5	201.0		
3/4 20	117.0	47.5	204.0		
1 25	127.0	49.0	299.0		
1 1/4 32	140.0	56.0	303.0		
1 1/2 40	165.0	67.0	358.0		
2 50	178.0	73.0	367.0		
2 1/2 65	190.0	85.0	408.0		
3 80	203.0	94.0	470.0		
4 100	229.0	110.0	498.0		
5 125	356.0	150.0	599.0		
6 150	394.0	175.0	632.0		
8 200	457.0	220.0	741.0		
10 250	533.0	266.5	792.0		

Specifications

10K CAST STAINLESS STEEL BALL VALVE FLANGED ENDS WITH PNEUMATIC ACTUATOR, 静電防止機構付, フルボア形, IS05211対応, スプリングリターン型

End to End : ASME B16.10 CLASS 150, End Connection : JIS B2220 10K, Wall Thickness : ASME B16.34 CLASS 150, Test Standard : KITZ STANDARD, Sizes : 1/2-10inch(15-250mm), KITZ Fig : BS-10UTDZ

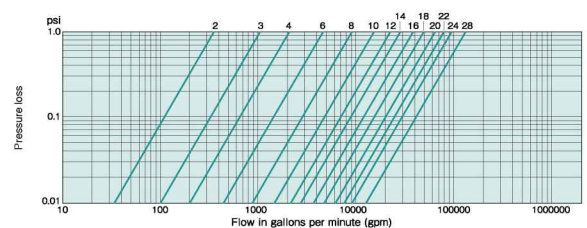

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

KITZ

KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan
© KITZ Corporation. All Right Reserved.

ISO 9001
CERTIFIED
Since 1989