

Strainer

STR-1F | Y-Type Strainer


► Specifications

Working Pressure (kgf/cm ²)	10
Working Temperature (°C)	220
Connection	JIS 10K Flanged
Materials	Body : Cast Iron
	Trim : Stainless Steel



► 치 수 (Dimensions)

Part \ Size	15A	20A	25A	32A	40A	50A	65A	80A	100A
L	125	140	165	175	195	220	285	305	360
H	65	75	85	95	105	115	206	236	274
Is	34.3	49	63	66	75.5	87.5	160	190	230
ds	23	28	38	46	51	59	70	85	106

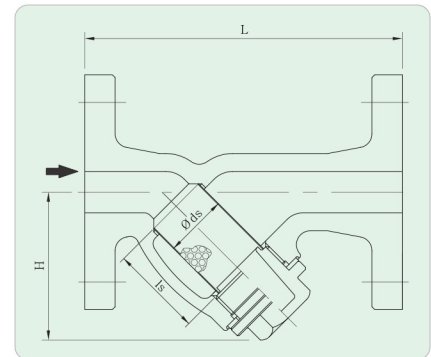

STR-2F/STR-3F | Y-Type Strainer

► Specifications

Model	STR-2F	STR-3F
Working Pressure (kgf/cm ²)	20	30
Working Temperature (°C)	Max. 250	Max. 250
Connection	JIS 20K Flanged	JIS 30K Flanged
Materials	Body : Cast Iron	Body : Cast Iron
	Trim : Stainless Steel	Trim : Stainless Steel



► Dimensions

STR-2F	15A	20A	25A	32A	40A	50A	65A	80A	100A	125A	150A	200A	250A	300A
L	125	140	165	175	195	220	289	313	364	414	484	578	714	833
H	65	75	85	95	105	115	206	236	275	325	380	450	524	587
Is	34.3	49	63	66	75.5	87.5	160	190	230	270	320	380	430	460
ds	23	28	38	46	51	59	70	85	106	134	160	206	270	330

STR-3F	15A	20A	25A	32A	40A	50A
L	131	140	170	182	202	220
H	65	75	85	95	105	115
Is	34.3	49	63	66	75.5	87.5
ds	23	28	38	46	51	59

