


FULL PORT TWO-PIECE BALL VALVE TC123/TC125 SCREWED END 1000W.O.G/PN63



二片式牙口球塞閥

FULL PORT TWO-PIECE BALL VALVE
SCREWED END 1000W.O.G./PN63

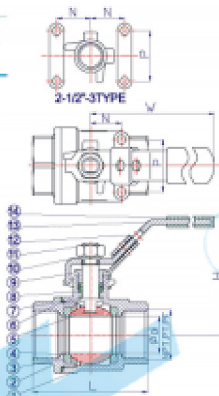

尺寸表 DIMENSIONS:

SIZE	d	L	H	W	N	P	Cv	TORQUE
DN NPS							FACTOR	N.M
8 1/4"	11.6	51	56	102	12.7	28.5	6.0	3.0
10 3/8"	12.7	54	56	102	12.7	28.5	7.0	3.0
15 1/2"	15	54	65	123	12.7	28.5	10	4.0
20 3/4"	20	64	68	123	21	35	25	7.5
25 1"	25	76	79	153	21	35	35	10
32 1 1/4"	32	83	84	153	23.5	38	46	12
40 1 1/2"	40	95	93	183	23.5	38	80	15
50 2"	50	107	99	183	23.5	38	110	25
65 2 1/2"	65	158	136	246	35	54	310	38
80 3"	80	167	146	246	35	54	360	72

特徵 FEATURES:

- 管螺紋按照 PIPE THREAD IN ACCORDANCE:
NPT, BSPT, DIN 259, DIN 2999, ISO 228 CLASS A
- 防爆軸心/全流量 BLOW-OUT PROOF STEM / FULL PORT
- 精密鑄造 INVESTMENT CASTING BODY
- 1000PSI(PN63)W.O.G.
- 掛鎖裝置 LOCKING DEVICE

材質表 MATERIALS LIST:

NO.	部件名稱	PART NAME	材料 MATERIAL	
			TC123	TC125
1	閥體	BODY	WCB	CF8M
2	閥蓋	CAP	WCB	CF8M
3	鋼球	BALL		CF8M
4	球墊	SEAT		PTFE
5	軸心	STEM		SUS316
6	大薄片	GASKET		PTFE
7	小薄片	THRUST WASHER		PTFE
8	中口	PACKING		PTFE
9	輪帽	GLAND		SUS304
10	彈簧華司	SPRING WASHER		SUS304
11	軸心螺母	STEM NUT		SUS304
12	掛鎖裝置	LOCKING DEVICE		SUS304
13	把手	HANDLE		SUS304
14	把手套	PLASTIC COVER		PLASTIC